

NEW

The TD1000 Series Ultra High Resolution Digital Measurement, General Purpose, Pressure Transducer



SERIES: TD1000

FEATURES

- Totally digital proprietary design
- Innovative redundant sensing elements
- 24V digital output for pressure or temp switch point
- Voltage and current outputs
- Custom pressure Ranges and outputs available
- More standard pressure ranges, Industry First
- Optional 4x or 10x over pressure (on most ranges)
- 0.25% and 0.1% accuracy available
- ASIC technology, no zero/span potentiometers
- All stainless steel welded housing
- IP-69K rated seal available (high pressure wash down)
- Innovative low current consumption, ideal for custom wireless solutions
- Programable systems available for OEM/systems integrators for in-house configuring of outputs, ranges and set points to reduce inventory and lead times
- Calibration Certificates available (contact customer service)

DESCRIPTION



The TD1000 Series digital/configurable (an industry first) industrial pressure transducer features stability and accuracy over a wide temperature range at lower cost than competitive units typically not found in older analog designs yet is plug and play with most lower grade competitive units.

With its proprietary digital/ASIC technology, the TD1000 Series features field proven redundant sensing elements without the need for solder in resistors or trim pots that can drift over time. This provides years of excellent performance and reliability even in the harshest/demanding applications. This combined with optional 4x or 10x over pressure and the optional integrated temperature or pressure digital switch feature, makes the TD1000 Series truly an industry first and second to none.

For extreme applications where power washers are used for wash down, the TD1000 Series optional IP69K seal, another industry first, makes it ideal no matter what the environment.

With its flexible low power design and lower manufacturing costs, the TD1000 Series offers outstanding value and makes it ideal for custom wireless applications.

ELECTRICAL CONNECTIONS

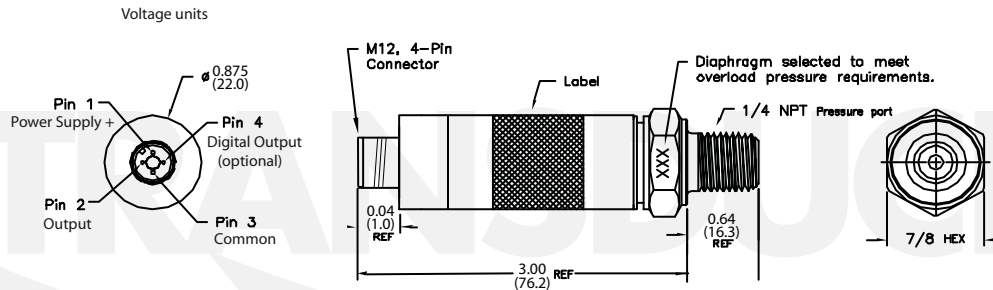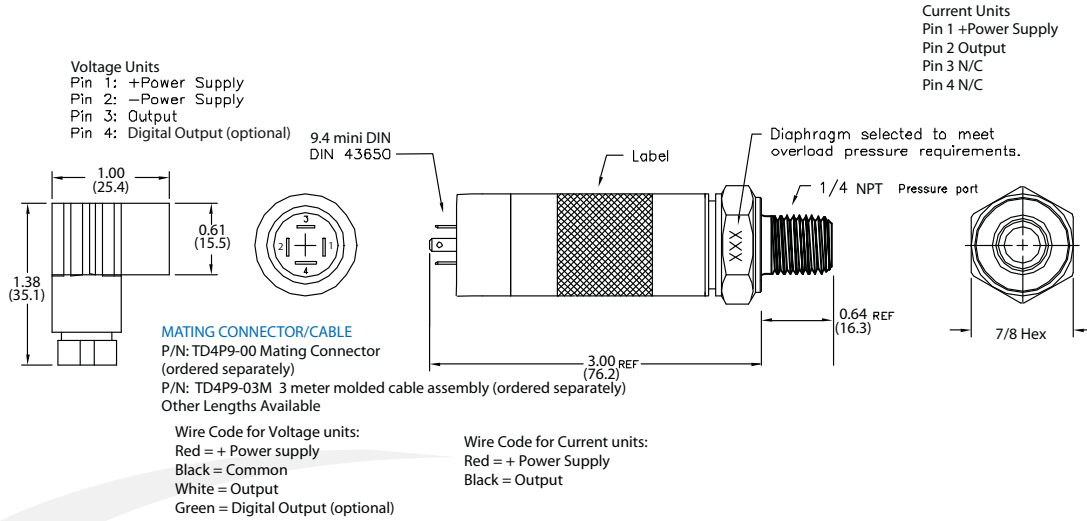

M12 MATING CABLE ASSEMBLIES

VOLTAGE OUTPUT TRANSDUCERS ONLY
M12 with 2 LEDs (green and yellow) Green shows power, Yellow shows digital output
P/N: TDM12-4F69-CR2L-01M 1 meter molded cable assembly for voltage outputs only

CURRENT OUTPUT TRANSDUCERS ONLY
M12 with no LEDs
P/N: TDM12-4F69-CR-01M 1 meter molded cable assembly for 4-20mA outputs (no digital output available with 4-20mA outputs)

Other Lengths Available

Wire Code for voltage units:
Brown = + Power Supply
White = Output
Blue = Common
Black = Digital Output (optional)

Wire Code for Current units:
Brown = + Power Supply
Blue = Output

*Dimensions are for reference only.
(X.X) = mm*

SPECIFICATIONS

Performance

Accuracy

Overrange Protection

Pressure Range

Burst Pressure

Pressure Cycles

Update Time

Digital Output

Performance @ 25°C (77 °F)

0.25% BFSL

2x Rated Pressure or optional 4x and 10x

see ordering chart - up to 6000 psi (690 bar) (optional higher ranges available)

5x or 20,000 psi, whichever is less

>100 million

<=1msec

Optional digital output for pressure, maintenance or temp switch point (not available on 4-20mA output units)

Environmental Data

Temperature

Compensated Temperatures

Operating Temperatures

Storage

TEB

Long Term Drift

Shock

Vibration

EMI/FRI Protection

Rating

Approvals

-40° to 100° C (-40 to 212° F)

-40° to 100° C (-40 to 212° F)

-40° to 125° C (-40° to 250° F)

0.9% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability)

0.2% FS/year (non-cumulative)

100g, 11 ms, 1/2 sine

20g, peak, 20 to 2400 Hz

Yes

Up to IP-69K available (high pressure wash down)

CE

Mechanical Configuration

Pressure Connections

Wetted Material

Electrical Connection

Case

See ordering chart

17-4PH stainless steel (for other materials consult factory)

Cable, 9.4 Din, IP-69K 4 pin M12 Connector

(housing) 304 stainless steel

Electrical Data

Excitation

Output

Output Impedance

Current Consumption

Output Noise

Reverse Polarity Protection

Set Point % for Pressure or Temp

3.3-28VDC, Typ (must be at least 0.3V above full output voltage) (7.5VDC min for 4-20mA)

see ordering chart

<100 Ohms, Nominal

25mA max (current output), <5mA (voltage output)

<2mV RMS

Yes

For pressure, this is done by selecting a percentage of your transducer's full range and this will be the set point (40% of a 1000 psi range will have the set point at 400psi) "P40".

For temperature, select what percentage of 80° C you want the set point to be (70% of 80° C is 56° C [132.8° F] and this will be the set point) "T70".

This output indicates transducer is in maintenance mode.

Maintenance Output

ORDERING

Series	Output	Pressure Type	Pressure Range	Pressure Connection	Electrical Connection	Accuracy	Pressure or Temp Set Point % (P or T)
TD1000	BB	G	0005	03	Q00	2	T40
TD1000 = 2x Over Pressure	BB= 4-20mA	G = Gauge	0015 0900	03= 1/4" NPT Male	Q00= IP69K M12	2= 0.25%	X= no SP
TD1004 = 4x Over Pressure	CC= 0-5 vdc		0025 1000	09= 7/16" x 20	D00= 4 pin	**	M= Maintenance
(up to 5000 psi)	DD= 0-10 vdc		0050 2000	**	9.4 Mini DIN		P or T10= 10%
TD1010 = 10x Over Pressure	HH= 1-5 vdc		0100 3000				P or T20= 20%
(up to 2000 psi)	JJ= 1-6 vdc		0150 4000				P or T30= 30%
	GG= 0.5-5.5 vdc		0200 5000				P or T40= 40%
	(nonratiometric)		0250 6000				P or T50= 50%
	**		0300				P or T60= 60%
			0400				P or T70= 70%
			0500				P or T80= 80%
			0600				P or T90= 90%
			0700				(of full range)
			0800				(full temp range
			**				is 0 to 80° C)
							**

**= Consult factory for further options.

Consult factory for quick ship versions.

Pressure, maintenance and temp set points are available with voltage outputs only. Configured as normally-open.