

**NEW**

The TDH30 Series  
Low Cost OEM Pressure  
Transducer



SERIES: TDH30



**APPLICATIONS**

- Hydraulic / Mobile Hydraulic
- Pneumatic Systems
- Food and Beverage Industry
- Refrigeration Systems
- Pumps and Compressors
- Energy and water management
- Construction and Agricultural Equipment

**DESCRIPTION**

The TDH30 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, ease of installation and is very economical as well as reliable.



The TDH30 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

**FEATURES**

- 3 to 10,000 psi Range
- Various Outputs
- Compact Design
- 316 Stainless steel Housing
- Low Cost
- Industrial 1% Accuracy
- Custom Outputs and Ranges Available
- OEM Tested and Approved
- Low power consumption

**ELECTRICAL CONNECTIONS**

Signal	Function	Color	Pin	Electrical Connector DIN 4 pin (9.4)
0-5V	Supply V + Com Output N/A	Red Black White N/A	1 2 3 4	
4-20mA	Supply V Output	Red Black	1 2	
Signal	Function	Color	Pin	3 pin Packard
0-5V	Com Supply + Output +	Black Red White	A B C	
4-20mA	Output Supply +	Black Red	A B	



## SPECIFICATIONS

### Input

Supply Voltage	12-36 VDC
Pressure Range	3 to 10,000 psi
Proof Pressure	1.5 x full scale
Burst Pressure	3 x full scale
Fatigue Life	More than 4 million cycles

### Performance @ 25° C (77° F)

Accuracy	1% full scale, BFSL
Stability	0.2% full scale
Compensated Temperatures	-10 to 75 ° C (14 to 167 ° F)
Operating Temperatures	-20 to 80 ° C (-4 to 176 ° F)
Zero and Span Offset Tolerance	1.5%
Current Consumption	Approx 3mA for voltage output, 22mA for current output (4-20mA)


### Mechanical Configuration

Pressure Port	1/4 NPT (standard) *
Electrical Connection	9.4 mini DIN, 3 pin Packard *
Ingress Rating	IP65 with T-Direct standard 9.4 DIN cable
Housing	316 stainless steel
Diaphragm Material	3-75psi = 316 SS, >75-1600psi = ceramic, >1600-10,000 = 17-4 SS 316SS is available instead of ceramic upon request
Sealing Material	Neoprene
Approvals	CE


For best performance use shielded cables

Mating connectors and cable assemblies sold separately

\* = Consult factory for further OEM options

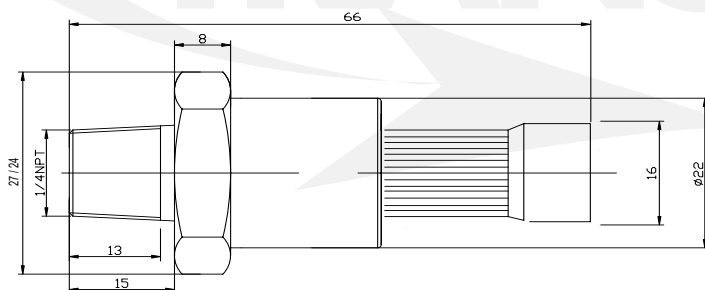

### Dimensions

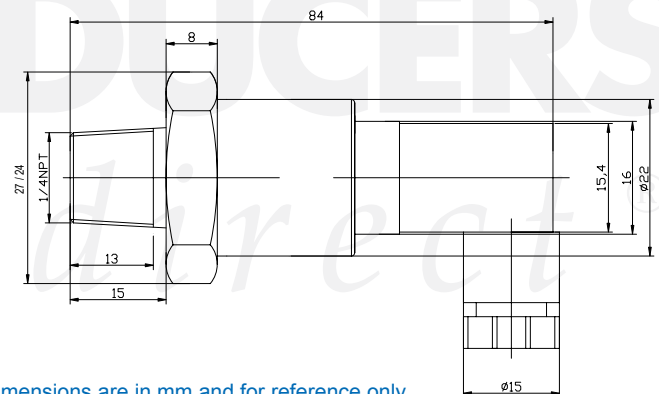

Dimensions are in mm and for reference only

## ORDERING

Series	Output	Pressure Type	Pressure Range	Pressure Port	Electrical Connection	Accuracy
TDH30	B	G	0500 psi	03	D00	4
	B= 4-20mA C= 0-5V (3 wire) **	G = Gauge	0015 0025 0050 0100 0250 0500 1000 3000 5000	03= 1/4" NPT Male **	D00= 4 pin Mini 9.4 DIN B00= 3 pin Packard **	4= 1% **

\*\* = Consult factory for further OEM options

Pressure ranges and outputs listed above are quick ship versions

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use. While we provide application assistance personally, through our literature and the Transducers Direct web site, it is up to the customer to determine the suitability of the product in the application.

REV: 10.11